アルゴリズムとデータ構造入門
2.2.4 図形言語
(Picture Language)

奥 乃 博

大学院情報学研究科
知能情報学専攻音声メディア分野
http://winnie.kuis.kyoto-u.ac.jp/
~okuno/Lecture/09/IntroAlgDs/
okuno@i.kyoto-u.ac.jp



TRON のベース ASAS on Lisp

Craig W. Reynolds (III): Computer animation with scripts and actors, *Computer Graphics*, Vo.16, No.3, pp.289-296.

```
(defop arch-fractalizer
   (param: arch-element top-color bot-color levels
           fractal-ratio height width leg-width)
   (local: (total-levels  levels)
           (offset-dist  (half (dif width leg-width)))
           (sub-tower-offset-1 (vector offset-dist 0 0))
           (sub-tower-offset-2 (mirror x-axis
                                 sub-tower-offset-1)))
   (arch-tower levels))

(defop arch-tower
   (param: levels)
   (if (zerop levels)
       (then nothing)
       (else (add-arch-level (arch-tower
                              (dif levels 1))))))
(defop add-arch-level
    (param: sub-tower)
    (grasp sub-tower
           (scale factal-ratio)
           (move (vector 0 height 0))
           (rotate 0.25 y-axis))
    (grasp arch-element
           (recolor (interp (quo levels total-levels)
                            bot-color top-color)))
    (subworld (group arch-element
              (move subtower-offset-1 sub-tower)
              (move subtower-offset-2 sub-tower)))))
```

12月22日・本日のメニュー

2.2.4 Picture Language(図形言語)

1. Square-limit
2. Square limit variation, 和田の解説
3. Space Padding Functions
4. Fractal (Self-Similarity)
   1. Hilbert curve
   2. Koch snowflake
   3. Sierpinski's Gasket
   4. Peano curve
5. Circle limit

今日は必修課題の説明です.

補足: tustk2 の読込み時エラー

- JAKLD では関係ありません.
- エラーメッセージ

```
> (load 'zorro.scm)
Loading zorro.scm...
Error:  Compile error.
| is not a pair.
To print debugger commands, type :H.
Debug[1]>
```

- cygwin上のTUS: 改行が nl (\n) でないといけない
  - で改行が "cr nl" か"nl"だけかをチェック.

    od -a ファイル | more
  - “cr nl” ならば, “nl” に変換

    tr ‘\r’ ‘ ’ < ファイル > 新しいファイル名

    空白

10

図形言語 Picture language とは

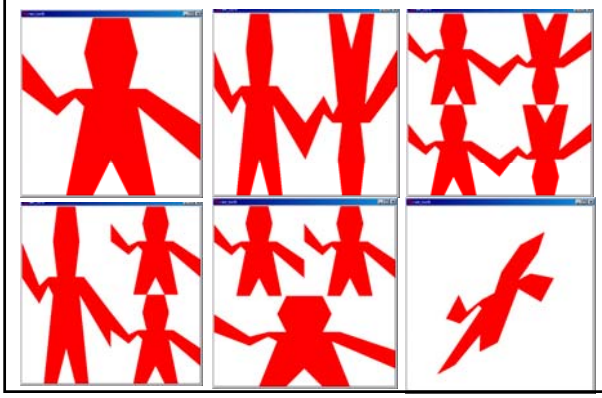

図形言語 Picture languageとは

図形言語での学習目標

- 図形操作の抽象化
- 実際に図形言語で, フラクタル, 空間充填曲線が作成できる技術

12

図形言語の使い(JAKLKD-README.jp.txt)

% java –Xss1m –jar d:/java/scheme/jakld.tar　　あるいは
% rlwrap java –Xss1m –jar d:/java/scheme/jakld.tar（コマンド行編集可）
> (load “init.lsp”)
　　ここで，(start-picture) と show の定義，frm1, frm2, frm3 等の設定．
> (define orida (image->painter “orida-sensei.gif”))
> (orida frm1)　　; 標準フレーム用キャンバス frm1 で描画
> (clear-picture)　; 描いた絵を白紙に戻す
> (orida frm2)　　; 歪んだキャンバス frm2 で描画
> (clear-picture)
> (load “wave.lsp”)　; wave の定義を読み込む
> (wave frm1)　　; 人形を描画
> ((square-limit wave 4) frm1)　; square-limit を描画
> (save-picture “wave.jpg”) ; 絵をjpegファイルへ出力

13

init.lsp for JAKLD

```
;;; sample init file for JAKLD Picture Language
(start-picture)

;; Standard frame
(define frm1 (make-frame (make-vect 0.0 0.0)
                         (make-vect 1.0 0.0)
                         (make-vect 0.0 1.0)))

;; Shearing frame
(define frm2 (make-frame (make-vect 0.0 0.0)
                         (make-vect 0.66 0.33)
                         (make-vect 0.33 0.66)))

;; Compress to left
(define frm3 (make-frame (make-vect 0.0 0.0)
                         (make-vect 0.5 0.0)
                         (make-vect 0.0 1.0)))

;; Compress to bottom
(define frm4 (make-frame (make-vect 0.0 0.0)
                         (make-vect 1.0 0.0)
                         (make-vect 0.0 0.5)))

(define (show painter . frame)
  (clear-picture)
  (painter (if (null? frame) frm1 (car frame))))
```

14

図形言語の使い2(README.jp.txt)

> (set-color <*color*>)
> (set-bg-color <*color*>)
　　<*color*>::= black | blue | cyan | dark-gray | gray | green |
　　light-gray | magenta | orange | pink | red | white | yellow |
　　#xrrggbb
> (clear-picture)　; ウィンドウの白紙化
> (show-picture)　; ウィンドウの再描画
> (hide-picture)　; ウィンドウを隠す
> (save-picture <*file*>)　; 描画された絵をファイルに出力
　　<*file*>::= *.bmp | *.jpeg | *.jpg | *.png
> (point->painter <*x*> <*y*>)　; ピクセル(x,y)に点を描画
> (procedure->painter <*function*> [<*arg*>])　; ピクセルを描画

picture.lsp や sample.lsp に多数のヒントあり.

15

図形言語の使い3（README.txt）

> (point->painter <x> <y>)　；ピクセル(x,y)に点を描画
> (procedure->painter <function> [<arg>])　；ピクセルを描画
> (vertexes->painter <vertex-list> <fill?>)
> (segments->painter <segments-list>)
> (image->painter <image-file>)

> (draw-line <absolute-start-point> <absolute-end-vertex>)
> (draw-polygon <absolute-vertex-list> <fill?>)

picture.lsp や sample.lsp に多数のヒントあり.

16

Procedure->painter in JAKLD

```
(define (circle z)
  (let ((r (+ (expt (- (car z) 0.5) 2)
              (expt (- (cdr z) 0.5) 2) )))
    (if (and (>= r 0.245) (< r 0.250))
        #p000000      ; black
      #xffffff ) ))   ; white

((procedure->painter circle) frm1)
```







17

図形言語の使い（README.tustk）

% tustk
> (load '/usr/local/lib/tustk/demos/picl)
> (load '/usr/local/lib/tustk/demos/picl-test)
> (make-canvas frm1)　　；標準フレーム用キャンバスの作成
> ((square-limit wave 2) frm1)
> (tk:update)　　；上記実行で描画されなかった場合や
　　；再描画が必要なときに実行
> (clear)　　；描いた絵を消す
> ((square-limit wave 4) frm1)
> (clear)
> ((squash-inwards wave) frm1)
> (forget-canvas)　　；現在のキャンバスを削除
> (make-canvas frm2)　　；傾いたフレーム用キャンバスの作成
> ((square-limit wave 4) frm2)
> (output-canvas 'wave.ps)　；絵をPostScriptファイルへ出力

19

図形言語の使い方（README.tustk）

- *bg-color*　　；背景色の定義
- *line-color*　　；描画線の定義
- (set! *bg-color* <色>) ；色の設定を変更
- <色>；色名（blue, "red", ...), RGB指定（"#RRGGBB"）
- 図形は painter で定義
  - 点　　(make-vect <*x-coordinate*> <*y-coordinate*>)
  - 線（セグメント）(make-segment <*from-point*> <*to-point*>)
  - 線画　　(segments->painter <*list-of-seguments*>)
  - 多角形（ポリゴン）(vects->painter <*list-of-points*>)
  - (vects->painter <*list-of-points*> <*smooth-or-not*> <*degree-of-smoothing*> <*filling-color*>)
  - (pgm-file->painter <*file-name*>) ; GIF/PPM/PGM

```
(define sicp (pgm-file->painter
              "/usr/local/lib/tustk/demos/sicp.ppm"))
((square-limit sicp 4) frm1)
```

20

wave の定義

線を次々描いていく.

```
(define wave
  (segments->painter
    (list (make-segment (make-vect 0.25 0.00) (make-vect 0.35 0.50))
          (make-segment (make-vect 0.35 0.50) (make-vect 0.30 0.55))
          (make-segment (make-vect 0.30 0.55) (make-vect 0.20 0.45))
          (make-segment (make-vect 0.20 0.45) (make-vect 0.00 0.80))
          (make-segment (make-vect 0.00 0.80) (make-vect 0.20 0.55))
          (make-segment (make-vect 0.20 0.55) (make-vect 0.30 0.60))
          (make-segment (make-vect 0.30 0.60) (make-vect 0.40 0.60))
          (make-segment (make-vect 0.40 0.60) (make-vect 0.35 0.80))
          (make-segment (make-vect 0.35 0.80) (make-vect 0.40 1.00))
          (make-segment (make-vect 0.60 1.00) (make-vect 0.65 0.80))
          (make-segment (make-vect 0.65 0.80) (make-vect 0.60 0.60))
          (make-segment (make-vect 0.60 0.60) (make-vect 0.70 0.60))
          (make-segment (make-vect 0.70 0.60) (make-vect 1.00 0.40))
          (make-segment (make-vect 1.00 0.20) (make-vect 0.65 0.50))
          (make-segment (make-vect 0.65 0.50) (make-vect 0.75 0.00))
          (make-segment (make-vect 0.60 0.00) (make-vect 0.50 0.20))
          (make-segment (make-vect 0.50 0.20) (make-vect 0.40 0.00))
    )))
```

21

filled-wave



JAKLD

```
(define filled-wave
  (vertexes->painter
    (list (make-vect 0.25 0.00) (make-vect 0.35 0.50)
          (make-vect 0.30 0.55) (make-vect 0.20 0.45)
          (make-vect 0.00 0.60) (make-vect 0.00 0.80)
          (make-vect 0.20 0.55) (make-vect 0.30 0.60)
          (make-vect 0.40 0.60) (make-vect 0.35 0.80)
          (make-vect 0.40 1.00) (make-vect 0.60 1.00)
          (make-vect 0.65 0.80) (make-vect 0.60 0.60)
          (make-vect 0.70 0.60) (make-vect 1.00 0.40)
          (make-vect 1.00 0.20) (make-vect 0.65 0.50)
          (make-vect 0.75 0.00) (make-vect 0.60 0.00)
          (make-vect 0.50 0.20) (make-vect 0.40 0.00) )
    #t ))
```

点をつないで，ポリゴンを作成し，色を塗る.

22

filled-wave



Tustk

```
(define red-wave
  (vects->painter
    (list (make-vect 0.25 0.00) (make-vect 0.35 0.50)
          (make-vect 0.30 0.55) (make-vect 0.20 0.45)
          (make-vect 0.00 0.60) (make-vect 0.00 0.80)
          (make-vect 0.20 0.55) (make-vect 0.30 0.60)
          (make-vect 0.40 0.60) (make-vect 0.35 0.80)
          (make-vect 0.40 1.00) (make-vect 0.60 1.00)
          (make-vect 0.65 0.80) (make-vect 0.60 0.60)
          (make-vect 0.70 0.60) (make-vect 1.00 0.40)
          (make-vect 1.00 0.20) (make-vect 0.65 0.50)
          (make-vect 0.75 0.00) (make-vect 0.60 0.00)
          (make-vect 0.50 0.20) (make-vect 0.40 0.00) )
  #f 0 'red ))
```

点をつないで，ポリゴンを作成し，色を塗る．

23

letterlambda の定義

```
(define letterlambda
  (segments->painter
   (list
     (make-segment (make-vect .45 .6) (make-vect .25 .2))
     (make-segment (make-vect .25 .2) (make-vect .2 .2))
     (make-segment (make-vect .2 .2) (make-vect .2 .1))
     (make-segment (make-vect .2 .1) (make-vect .3 .1))
     (make-segment (make-vect .3 .1) (make-vect .5 .5))
     (make-segment (make-vect .5 .5) (make-vect .7 .1))
     (make-segment (make-vect .7 .1) (make-vect .8 .1))
     (make-segment (make-vect .8 .1) (make-vect .8 .2))
     (make-segment (make-vect .8 .2) (make-vect .75 .2))
     (make-segment (make-vect .75 .2) (make-vect .4 .9))
     (make-segment (make-vect .4 .9) (make-vect .3 .9))
     (make-segment (make-vect .3 .9) (make-vect .3 .8))
     (make-segment (make-vect .3 .8) (make-vect .35 .8))
     (make-segment (make-vect .35 .8) (make-vect .45 .6))
    )))
```

24

filled-letterlambda

JAKLD

```
(define filled-letterlambda
  (vertexes->painter
    (list
      (make-vect .45 .60) (make-vect .25 .20)
      (make-vect .25 .20) (make-vect .20 .20)
      (make-vect .20 .20) (make-vect .20 .10)
      (make-vect .20 .10) (make-vect .30 .10)
      (make-vect .30 .10) (make-vect .50 .50)
      (make-vect .50 .50) (make-vect .70 .10)
      (make-vect .70 .10) (make-vect .80 .10)
      (make-vect .80 .10) (make-vect .80 .20)
      (make-vect .80 .20) (make-vect .75 .20)
      (make-vect .75 .20) (make-vect .40 .90)
      (make-vect .40 .90) (make-vect .30 .90)
      (make-vect .30 .90) (make-vect .30 .80)
      (make-vect .30 .80) (make-vect .35 .80)
      (make-vect .35 .80) (make-vect .45 .60) )
    #t ))
```

25

filled-letterlambda の

Tustk

```
(define red-letterlambda
  (vects->painter
    (list
      (make-vect .45 .60) (make-vect .25 .20)
      (make-vect .25 .20) (make-vect .20 .20)
      (make-vect .20 .20) (make-vect .20 .10)
      (make-vect .20 .10) (make-vect .30 .10)
      (make-vect .30 .10) (make-vect .50 .50)
      (make-vect .50 .50) (make-vect .70 .10)
      (make-vect .70 .10) (make-vect .80 .10)
      (make-vect .80 .10) (make-vect .80 .20)
      (make-vect .80 .20) (make-vect .75 .20)
      (make-vect .75 .20) (make-vect .40 .90)
      (make-vect .40 .90) (make-vect .30 .90)
      (make-vect .30 .90) (make-vect .30 .80)
      (make-vect .30 .80) (make-vect .35 .80)
      (make-vect .35 .80) (make-vect .45 .60) )
    #f 0 'red ))
```

26

12月9日・本日のメニュー

1. 2.2.4 Picture Language（図形言語）
   1. Square-limit
   2. 高階手続きによる定義
   3. 具体的な描画手続き
2. Square limit variation
   解説：和田英一「関数画家」, Webにあり.
3. Space Padding Functions
4. Fractal (Self-Similarity)
5. Circle limit

square-limit n

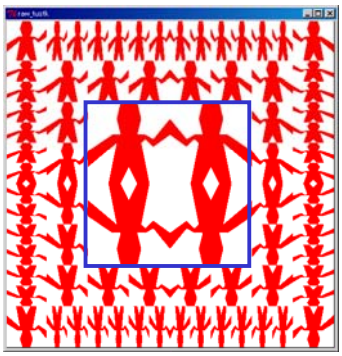

これから `square-limit` を作る.

左はレベル2

まず，中央

28

flipped-pair（拡張版）

wave2

```
(define wave2
    (beside wave (flip-vert wave)) )
(define wave4 (below wave2 wave2))
(define (flipped-pairs painter)
    (let ((painter2
            (beside painter
              (flip-vert painter) )))
      (below painter2 painter2)))
```

こうすると

```
(define wave4
      (flipped-pairs wave))
```

wave4

square-limit n

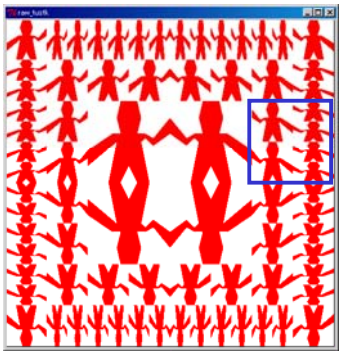

これから square-limit を作る.

左はレベル2

次は，右側

30

right-split n



```
(define (right-split painter n)
   (if (= n 0)
       painter
       (let ((smaller
               (right-split painter (- n 1))) )
          (beside painter
                  (below smaller smaller) ))))
```

identity	right-split n-1
	right-split n-1

未定義の手続き
- (below bottom top)
- (beside left right)

31

right-split n　の動き

```
(right-split wave 0)
(right-split wave 1)
(right-split wave 2)
(right-split wave 3)
(right-split wave 4)
```



32

right-split n　の動き

square-limit n

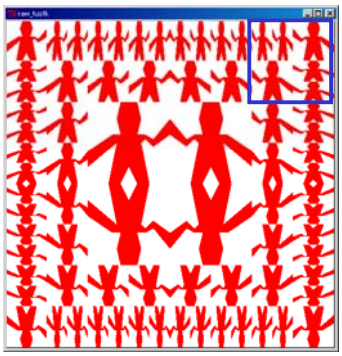

これから `square-limit` を作る.

左はレベル2

今度は，角

34

corner-split n

```
(define (corner-split painter n)
  (if (= n 0)
      painter
      (let ((up (up-split painter (- n 1)))
            (right (right-split painter (- n 1))) )
        (let ((top-left (beside up up))
              (bottom-right (below right right))
              (corner (corner-split painter (- n 1))) )
          (beside (below painter top-left)
                  (below bottom-right corner) )))))
```

up-split n-1	up-split n-1	corner-split n-1
identity		right-split n-1
		right-split n-1

未定義の手続き
- (below bottom top)
- (beside left right)

35

corner-split n　の動き

```
(corner-split wave 0)
(corner-split wave 1)
(corner-split wave 2)
(corner-split wave 3)
(corner-split wave 4)
```



36

corner-split n　の動き

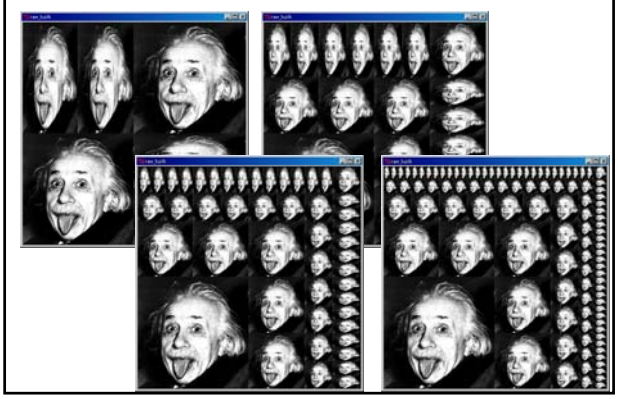

square-limit n

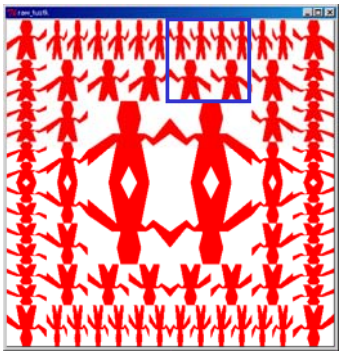

これから square-limit を作る.

左はレベル2

最後は，上

38

Ex.2.44 up-split

```
(define (up-split painter n)
   (if (= n 0)
       painter
       (let ((smaller
              (up-split painter (- n 1))) )
         (below painter
                (beside smaller smaller) ))))
```



- 未定義の手続き
- (below bottom top)
- (beside left right)

39

square-limit n

```
(define (square-limit painter n)
   (let ((quarter
          (corner-split painter n)) )
     (let ((half (beside
                  (flip-horiz quarter)
                  quarter )))
       (below (flip-vert half)
              half))))
```



square-limit n

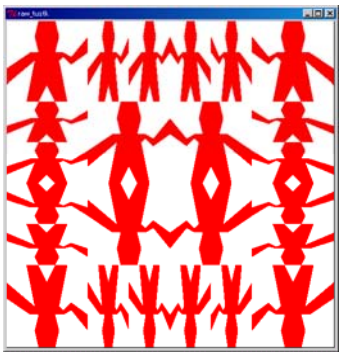

これで `square-limit` が完成.

左はレベル1

41

split群を抽象化

```
(define right-split (split beside below))
(define up-split (split below beside))
(define (split op1 op2)
   (op1 half (op2 quarter quarter)) ))
```





42

square-limit n の動き

```
(square-limit wave 0)
(square-limit wave 1)
(square-limit wave 2)
(square-limit wave 3)
(square-limit wave 4)
```



43

square-limit n　の動き

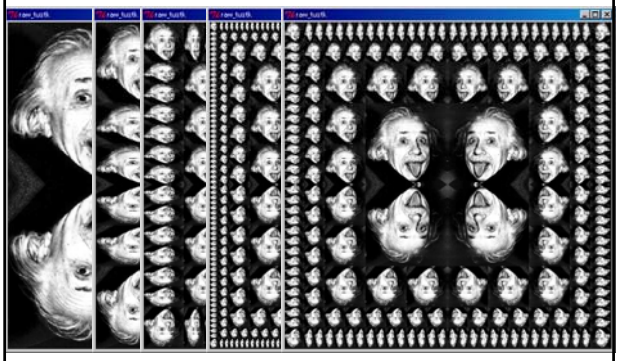

44

12月22日・本日のメニュー

2.2.4 Picture Language（図形言語）

1. Square-limit
2. Square limit variation, 和田の解説
3. Space Padding Functions
4. Fractal (Self-Similarity)
   1. Hilbert curve
   2. Koch snowflake
   3. Sierpinski's Gasket
   4. Peano curve
5. Circle limit

今日は必修課題の説明です.

Square Limit　をより抽象化

```
(define (square-of-four tl tr bl br)
   (lambda (painter)
      (let ((top (beside (tl painter)
                         (tr painter)) )
            (bottom (beside (bl painter)
                            (br painter) )))
         (below bottom top) )))
```

tl	tr
bl	br

未定義の手続き
- (below bottom top)
- (beside left right)

46

flipped-pairsの別の定義

```
(define (flipped-pairs painter)
   (let ((combine4
          (square-of-four
               identity flip-vert
               identity flip-vert )))
     (combine4 painter) ))
```

identity	flip-vert
identity	flip-vert

未定義の手続き
- (below bottom top)
- (beside left right)

47

square-limit の別の定義

```
(define (square-limit painter n)
  (let ((combine4
         (square-of-four
             flip-horiz identity
             rotate180 flip-vert )))
    (combine4
       (corner-split painter n)) ))
```



flip-horiz	identity
rotate180	flip-vert

48

12月22日・本日のメニュー

2.2.4 Picture Language（図形言語）
1. Square-limit
2. Square limit variation, 和田の解説
3. Space Padding Functions
4. Fractal (Self-Similarity)
   1. Hilbert curve
   2. Koch snowflake
   3. Sierpinski's Gasket
   4. Peano curve
5. Circle limit

今日は必修課題の説明です.

Frame coordinate map

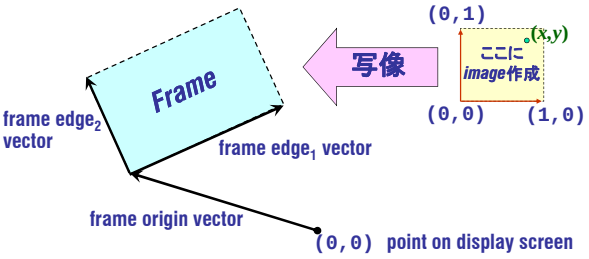

1. coordinate: unit squareに作成
2. frameに写像

$$\overrightarrow{\text{Origin}}(\text{Frame}) + x \cdot \overrightarrow{\text{Edge}_1}(\text{Frame}) + y \cdot \overrightarrow{\text{Edge}_2}(\text{Frame})$$

50

Frames

```
(define (frame-coord-map frame)
  (lambda (v)
    (add-vect
      (origin-frame frame)
      (add-vect (scale-vect (xcor-vect v)
                            (edge1-frame frame) )
                (scale-vect (ycor-vect v)
                            (edge2-frame frame) )
      ))))

    ((frame-coord-map a-frame)
     (make-vect 0 0) )
```

の返す値: (origin-frame a-frame)

51

Frames

```
(define (make-frame origin edge1 edge2)
  (list origin edge1 edge2) )

(define (make-frame origin edge1 edge2)
  (cons origin (cons edge1 edge2)) )
```

それぞれに対する選択子を書け.

52

Painters

```
(define (segments->painter segment-list)
  (lambda (frame)
    (for-each
     (lambda (segment)
       (draw-line
        ((frame-coord-map frame)
         (start-segment segment) )
        ((frame-coord-map frame)
         (end-segment segment) )))
     segment-list )))
```

(foreach *<procedure>* *<list-of-items>*)

53

Transforming and combining painters

```
(define (transform-painter painter
                origin corner1 corner2)
  (lambda (frame)
    (let ((m (frame-coord-map frame)))
      (let ((new-origin (m origin)))
        (painter
         (make-frame new-origin
            (sub-vect (m corner1)
                      new-origin)
            (sub-vect (m corner2)
                      new-origin)))))))
```

54

Transforming and combining painters

```
(define (flip-vert painter)
  (transform-painter
     painter
     (make-vect 0.0 1.0) ; new origin
     (make-vect 1.0 1.0) ; new end of edge1
     (make-vect 0.0 0.0))) ; new end of edge2
```

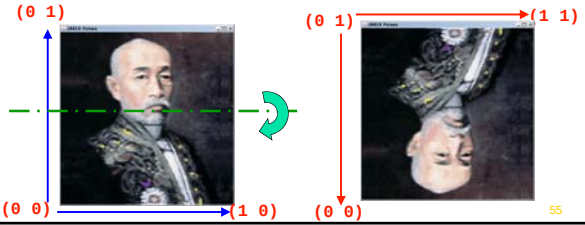

55

Transforming and combining painters

```
(define (shrink-to-upper-right painter)
  (transform-painter
      painter
     (make-vect 0.5 0.5)
     (make-vect 1.0 0.5)
     (make-vect 0.5 1.0) ))
```

56

combining painters

```
(define (rotate90 painter)
  (transform-painter
    painter
    (make-vect 1.0 0.0)
    (make-vect 1.0 1.0)
    (make-vect 0.0 0.0)
  ))
```

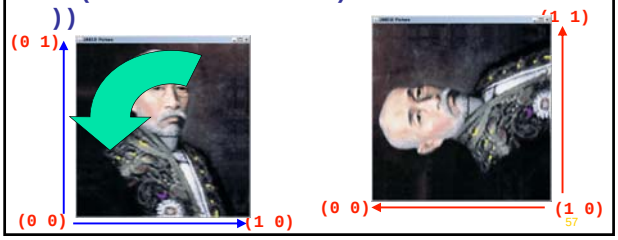

57

Transforming and combining painters

```
(define (squash-inwards painter)
  (transform-painter
      painter
      (make-vect 0.0 0.0)
      (make-vect 0.65 0.35)
      (make-vect 0.35 0.65)))
```

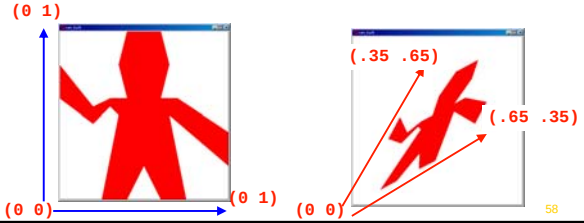

58

傾いたフレーム

```
(define frm2
    (make-frame
      (make-vect 0 0)
      (make-vect 1.0 0)
      (make-vect 0.5 0.5) ))
```

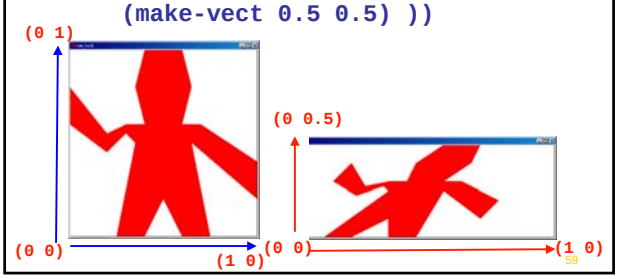

59

transform-painter（まとめ）

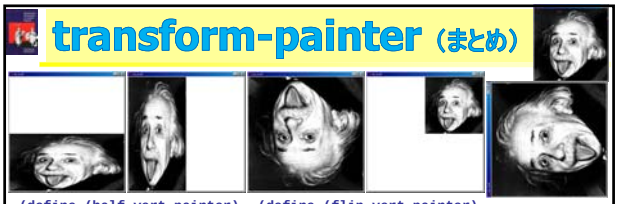

```
(define (half-vert painter)
  (transform-painter
     painter
     (make-vect 0.0 0.0)
     (make-vect 1.0 0.0)
     (make-vect 0.0 0.5)) )

(define (flip-vert painter)
  (transform-painter
     painter
     (make-vect 0.0 1.0
     (make-vect 1.0 1.0)
     (make-vect 0.0 0.0)) )

(define (half-horiz painter)
  (transform-painter
     painter
     (make-vect 0.0 0.0)
     (make-vect 0.5 0.0)
     (make-vect 0.0 1.0)) )

(define (shrink-to-upper-right painter)
   (transform-painter
     painter
      (make-vect 0.5 0.5)
      (make-vect 1.0 0.5)
      (make-vect 0.5 1.0)) )

(define (rotate90 painter)
  (transform-painter painter (make-vect 1.0 0.0)
                             (make-vect 1.0 1.0)
                             (make-vect 0.0 0.0) ))
```

60

Gifに出力，animated GIF作成

61

beside

```
(define (beside painter1 painter2)
  (let ((split-point (make-vect 0.5 0.0)))
    (let ((paint-left
           (transform-painter
                painter1
                (make-vect 0.0 0.0)
                split-point
                (make-vect 0.0 1.0) ))
          (paint-right
           (transform-painter
                 painter2
                 split-point
                 (make-vect 1.0 0.0)
                 (make-vect 0.5 1.0) )))
      (lambda (frame)
        (paint-left frame)
        (paint-right frame) ))))
```



62

Ex.2.51 below

```
(define (below painter1 painter2)
  (let ((split-point (make-vect 0.0 0.5)))
    (let ((paint-lower
           (transform-painter
                painter1
                
                
                
                ))
          (paint-upper
           (transform-painter
                painter2
                
                
                
                )))
      (lambda (frame)
        (paint-lower frame)
        (paint-upper frame) ))))
```



64

above m:n で分割

```
(define (above painter1 painter2 . a)
  (let* ((m (if (null? a) 1 (car a)))
         (n (if (or (null? a) (null? (cdr a)))
                1 (cadr a)))
         (r (/ n (+ m n)))
         (split-point (make-vect 0.0 r)) )
    (let ((paint-lower
           (transform-painter painter2
                              (make-vect 0.0 0.0)
                              (make-vect 1.0 0.0)
                              split-point) )
          (paint-upper
           (transform-painter painter1
                              split-point
                              (make-vect 1.0 r)
                              (make-vect 0.0 1.0) )))
      (lambda (frame)
        (paint-lower frame)
        (paint-upper frame) ))))
```



65

Stratified Design (成層設計)

図形言語のような設計法

- 各レベルでの部品化
  - Square-limit
  - Below, beside
  - Transform-painter
  - Draw-line

70

12月22日・本日のメニュー

2.2.4 Picture Language(図形言語)

1. Square-limit
2. Square limit variation, 和田の解説
3. Space Padding Functions
4. Fractal (Self-Similarity)
   1. Hilbert curve
   2. Koch snowflake
   3. Sierpinski's Gasket
   4. Peano curve
5. Circle limit

今日は必修課題の説明です.

Escher's square-limit

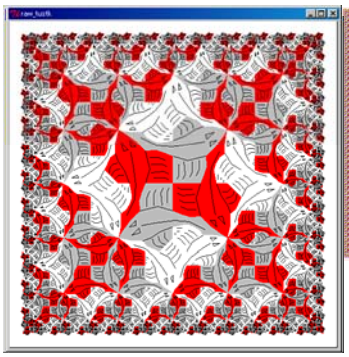

■和田:関数画家、『情報処理』、Vol.46, No.10 (2005) 1163-1171

■http://www.ecs.soton.ac.uk/~ph/papers/funcgeo2.pdf

72

12月22日・本日のメニュー

2.2.4 Picture Language（図形言語）

1. Square-limit
2. Square limit variation, 和田の解説
3. Space Padding Functions
4. Fractal (Self-Similarity)
   1. Hilbert curve
   2. Koch snowflake
   3. Sierpinski's Gasket
   4. Peano curve
5. Circle limit

今日は必修課題の説明です.

Hilbert curve の作成方法



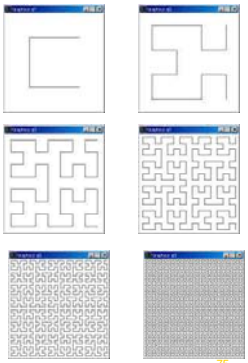

```
(hilbert 5)
```

75

Hilbert curve の作成方法

4つの基本形

1. 基本形A： D⇒A⇒A⇒B
2. 基本形B： C⇒B⇒B⇒A
3. 基本形C： B⇒C⇒C⇒D
4. 基本形D： A⇒D⇒D⇒C

基本形A	基本形B	基本形C	基本形D
			
分解形A	分解形B	分解形C	分解形D

77

Hilbert curve の手続き

1. 各基本形に対して，レベル0ならコ型を書くための頂点のリストを求める．
2. さもなければ，分解形を再帰的に呼び出し，頂点を求める．
3. 【JAKLD】求まった頂点リストから 折れ線を `vertexes->painter` を使用して作成．
   【Tustk】求まった頂点リストからsegment を求め `vectors->segment` と `segments->painter`を使って作成する．

`(vectors->segment` *<list of vectors>*`)`
`(segments->painter` *<list of segments>*`)`

Hilbert curve の手続き

```
(define (hilbert-a p0 q0 p1 q1 i)
  (let ((xs (/ (+ (* 3.0 p0) p1) 4.0))
        (ys (/ (+ (* 3.0 q0) q1) 4.0))
        (xm (/ (+ p0 p1) 2.0))
        (ym (/ (+ q0 q1) 2.0))
        (xl (/ (+ p0 (* 3.0 p1)) 4.0))
        (yl (/ (+ q0 (* 3.0 q1)) 4.0)) )
    (if (= i 0)
        (list (make-vect pl ql) (make-vect xs ql)
              (make-vect xs ys) (make-vect xl ys) )
        (append (hilbert-d xm ym p1 q1 (- i 1))
                (hilbert-a p0 ym xm q1 (- i 1))
                (hilbert-a p0 q0 xm ym (- i 1))
                (hilbert-b xm q0 p1 ym (- i 1)) ))))

(define (hilbert n)
  (segments->painter
    (vectors->segments (hilbert-a 0.0 0.0 1.0 1.0 n))) )
```



79

Koch snowflake の作成方法



`(koch 5)`

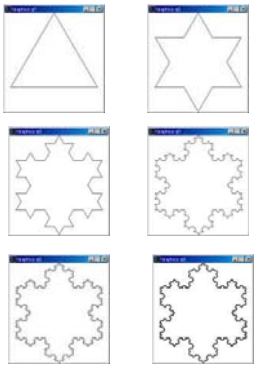

80

Koch snowflake の作成方法

線分の分解

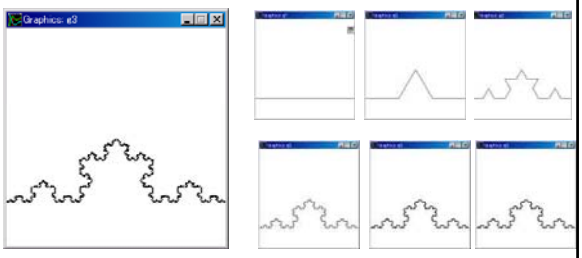

82

Koch snowflake の手続き

1. 各線分に対して，レベル0なら，三角形の頂点リストを求める．
2. さもなければ，分解形を再帰的に呼び出し，頂点を求める．
3. 【JAKLD】求まった頂点リストから 折れ線を `vertexes->painter` を使用して作成．
   【Tustk】求まった頂点リストからsegment を求め `vectors->segment` と `segments->painter`を使って作成する．

```
(vectors->segment <list of vectors>)
(segments->painter <list of segments>)
```

Koch snowflake（続）

```
(define (koch-line p0 q0 p1 q1 r i)
  (if (= i 0)
      (list (make-vect p0 q0) (make-vect p1 q1))
      (let* ((r1 (/ r 3.0))
             (x3 (/ (- p1 p0) 3.0))
             (y3 (/ (- q1 q0) 3.0))
             (xs (/ (+ (* 2.0 p0) p1) 3.0))
             (ys (/ (+ (* 2.0 q0) q1) 3.0))
             (xl (/ (+ p0 (* 2.0 p1)) 3.0))
             (yl (/ (+ q0 (* 2.0 q1)) 3.0))
             (xm (+ (* 0.5 x3) (* 0.866 y3) xs))
             (ym (+ (* 0.5 y3) (* -0.866 x3) ys)) )
        (append (koch-line p0 q0 xs ys r1 (- i 1))
                (koch-line xs ys xm ym r1 (- i 1))
                (koch-line xm ym xl yl r1 (- i 1))
                (koch-line xl yl p1 q1 r1 (- i 1))
        ))))
```

84

Koch snowflake の手続き（続）

```
(define (koch n)
  (let* ((h (/ 0.75 0.86))
         (p0 (/ (- 1.0 h) 2))
         (p1 (- 1.0 p0)) )
    (segments->painter
      (vectors->segments
        (append
          (koch-line p0 0.25 p1 0.25 1 n)
          (koch-line p1 0.25 0.5 1.0 1 n)
          (koch-line 0.5 1.0 p0 0.25 1 n)
        )))))
```

let* は let と違い、変数値対を順番に評価

85

色つきKoch curve の手続き

```
(define (koch-fill n . args)
  (let* ((h (/ 0.75 0.86))
         (p0 (/ (- 1.0 h) 2))
         (p1 (- 1.0 p0))
         (color (if (null? args) 'red (car args))) )
    (vects->painter
      (append (koch-line p0 0.25 p1 0.25 1 n)
        (koch-line p1 0.25 0.5 1.0 1 n)
        (koch-line 0.5 1.0 p0 0.25 1 n))
      #f 0 color )))

(define (fun-koch x)
   ((koch-fill 5 'pink) x)
   ((koch-fill 4 'while) x)
   ((koch-fill 3 'yellow) x)
   ((koch-fill 2 'green) x)
   ((koch-fill 1 'pink) x)
   ((koch-fill 0 'red) x)
  )
```



Sierpinski's Gasket の作成法



(sierpiski 6)

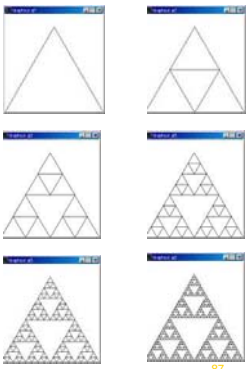

87

Sierpinski's Gasket の手続き

```
(define (gasket p0 q0 p1 q1 i)
  (let* ((xm (/ (+ p0 p1) 2.0))
         (ym (+ (* (- p1 p0) 0.866) q0))
         (xs (/ (+ (* 3.0 p0) p1) 4.0))
         (xl (/ (+ (* 3.0 p1) p0) 4.0))
         (ys (+ (* (- p1 p0) 0.433) q0)) )
    (if (= i 0)
       (list (make-vect p0 q0) (make-vect p1 q1)
             (make-vect (/ (+ p0 p1) 2.0) ym)
             (make-vect p0 q0) )
       (append (gasket p0 q0 xm q0 (- i 1))
               (gasket xm q0 p1 q0 (- i 1))
               (list (make-vect p0 q0))
               (gasket xs ys xl ys (- i 1))
               (list (make-vect p0 q0) )))))

(define (sierpenski n)
  (segments->painter
    (vectors->segments (gasket 0.0 0.0 1.0 0.0 n)) ))
```

88

色つきSierpinski's Gasket

```
(define (gasket-fill p0 q0 p1 q1 i color)
  (let* ((xm (/ (+ p0 p1) 2.0))
         (ym (+ (* (- p1 p0) 0.866) q0))
         (xs (/ (+ (* 3.0 p0) p1) 4.0))
         (xl (/ (+ (* 3.0 p1) p0) 4.0))
         (ys (+ (* (- p1 p0) 0.433) q0)) )
    (if (= i 0)
        (list (vects->painter
                (list (make-vect p0 q0)
                      (make-vect p1 q1)
                      (make-vect xm ym) )
                #f 0 color))
        (append (gasket-fill p0 q0 xm q0 (- i 1) color)
                (gasket-fill xm q0 p1 q0 (- i 1) color)
                (gasket-fill xs ys xl ys (- i 1) color) ))))

(define (sierpenski-fill n . args)
  (let ((color (if (null? args) 'red (car args))))
    (do ((i (gasket-fill 0.0 0.0 1.0 0.0 n color) (cdr i)))
        ((null? i))
      (i frm1) )))
```

89

Peano Curve の作成方法



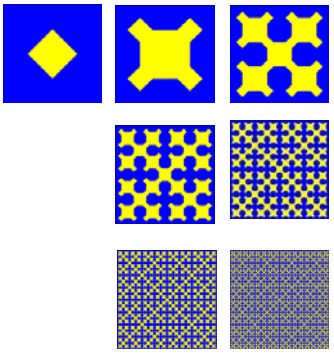

(peano 6)

90

Peano Curve の手続き

```
(define (peano-a p0 q0 p1 q1 i)
  (append (peano-a-1 p0 q0 p1 q1 i)
    (peano-a-2 p0 q0 p1 q1 i) ))

(define (peano-a-1 p0 q0 p1 q1 i)
  (let ((xs (/ (+ (* 3.0 p0) p1) 4.0)) (ys (/ (+ (* 3.0 q0) q1) 4.0))
        (xm (/ (+ p0 p1) 2.0)) (ym (/ (+ q0 q1) 2.0))
        (xl (/ (+ p0 (* 3.0 p1)) 4.0)) (yl (/ (+ q0 (* 3.0 q1)) 4.0)) )
    (if (= i 0)
        (list (make-vect xm yl) (make-vect xs ym))
        (append (peano-a-1 xm ym p1 q1 (- i 1))
                (peano-d-1 p0 ym xm q1 (- i 1))
                (peano-d-2 p0 ym xm q1 (- i 1))
                (peano-a-1 p0 q0 xm ym (- i 1)) ))))

(define (peano-a-2 p0 q0 p1 q1 i)
  (let ((xs (/ (+ (* 3.0 p0) p1) 4.0)) (ys (/ (+ (* 3.0 q0) q1) 4.0))
        (xm (/ (+ p0 p1) 2.0)) (ym (/ (+ q0 q1) 2.0))
        (xl (/ (+ p0 (* 3.0 p1)) 4.0)) (yl (/ (+ q0 (* 3.0 q1)) 4.0)) )
    (if (= i 0)
        (list (make-vect xm ys) (make-vect xl ym))
        (append (peano-a-2 p0 q0 xm ym (- i 1))
                (peano-b-1 xm q0 p1 ym (- i 1))
                (peano-b-2 xm q0 p1 ym (- i 1))
                (peano-a-2 xm ym p1 q1 (- i 1)) ))))
```



91

図形言語に複素数を導入

$$z_{n+1} = z_n^{\,2} + C$$
$$z_0 = C$$

が収束する点$C = (x, y)$

Mandelbrot Set

procedure->painer 使用

http://mathworld.wolfram.com/MandelbrotSet.html





宿題:1月12日正午締切

1. **square-limit を完成させる.**
2. **letterlambda色付を作成.**
3. **square-limit に適用.**
4. **【随意】square-limit-n (m:nに分割)**
5. **Program**(そのまま動くもの)と出力の絵を添付ファイルとしてメイルで送付.

subject: SICP-PICL-09

to: okuno@kuis.kyoto-u.ac.jp

必修課題2：2月12日正午締切

1. painterを1種類作成.
2. それをsquare-limit等に適用.
3. 空間充填曲線を1種類作成.
   （Hilbert curve, Peano curve, ...）
4. フラクタルを一種類作成.
   （Koch Snowflake, Sierpinsky's Gasket, ...）

- レポートはメイル，あるいは，紙で提出.
- プログラムはメイルで okuno@i.kyoto-u.ac.jp
- 例は：http://winnie.kuis.kyoto-u.ac.jp/
- 教えてもらった場合には，明記すること.
- 1は人と同じプログラム・作品（年度不問）は再提出.

94

JAKLDの音（MIDI)インタフェース

% java –Xss1m –jar d:/java/scheme/jakld-sound.tar　　あるいは
% rlwrap java –Xss1m –jar d:/java/scheme/jakld-sound.tar （編集機能）
> (load "summer.lsp")
> (load "theEntertainer.lsp")

マニュアルは，http://winnie.kuis.kyoto-u.ac.jp/
～okuno/Lecture/09/IntroAlgDs/index.html

- 随意課題S-1：図形言語のアナロジーとして，楽曲生成システムを作成.
- 随意課題S-2：無限音階（Sheperd Tone）を作成
  例1
  例2

95

Scot Joplin The Entertainer by 大塚君

```
; ============================
; initialization
; ============================
(define synth (get-synthesizer))
(define seqr (get-sequencer))
(set-receiver seqr synth)

(define seq (sequence 384))
(define trk0 (create-track seq)) ; track 0 (high part)
(define trk1 (create-track seq)) ; track 1 (right hand)
(define trk2 (create-track seq)) ; track 2 (left hand
      (bass))

; ============================
; write the score here
; ============================
(set-mml trk0
 "C0@0l16k60t75"
;;Intro
 "o6 dec<a^16bg8"
 "r2r2r4"
 "o5 q110d0g8 r8^8^16 r8"
;;Melody
 "t70o6 r2 r4^16 cdd+ecde^16<b>d8c4^8"
)

(set-mml trk1
 "C1@0l16k60t75"
;;Intro
 "o5 dec<a^16bg8 >dec<a^16bg8 dec<a^16baa-g8r8"
 ">q110g0b8 r8^8^16"
;;Melody
 "t70o4 dd+e>c8<e>c8<e>c^4^16"
 "o5 c0e d0f d+0f+ e0g c0e d0f e0g^16 <b0>d d0f8 c0e4^8"
 )

(set-mml trk2
 "C2@0l16k60t75"
;;Intro
 "o4 r2 dec<a^16bg8 dec<a^16baa-g8r8"
 "q110 g0<g8 r8^8^16"
;;Melody
 "t70o3l8 g0b <c >e0g0>c <<g0>g g0b-0>c <<f0>f a0>c"
 "<<e0>e g0>c <<g >e0g0>c <<g >f0g0b c e0g0>c
       <<c0>e0g0c8.."
)
```

96

図形言語の作品

- Gallery に掲載
- http://winnie.kuis.kyoto-u.ac.jp/ から「図形言語作品集」をクリック
- 面白いものは講義等で使わせても

DON'T PANIC!

97

気の利いたって？（H18受講生の作品集）

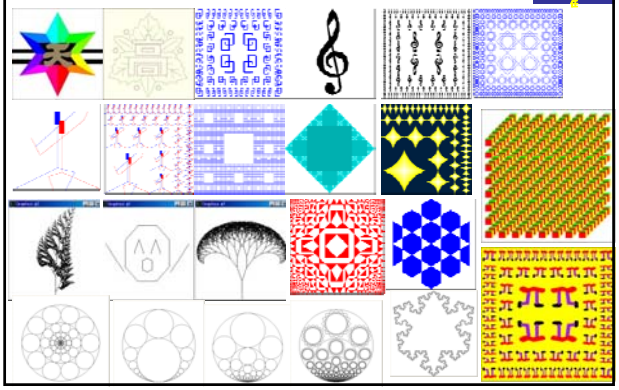

気の利いたって？（H17受講生の作品集）

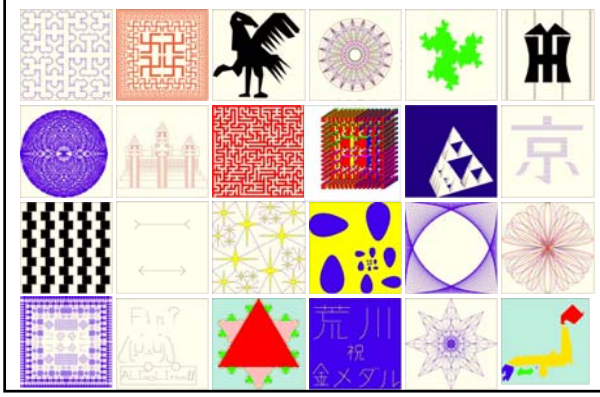

気の利いたって？（H16受講生の作品集）

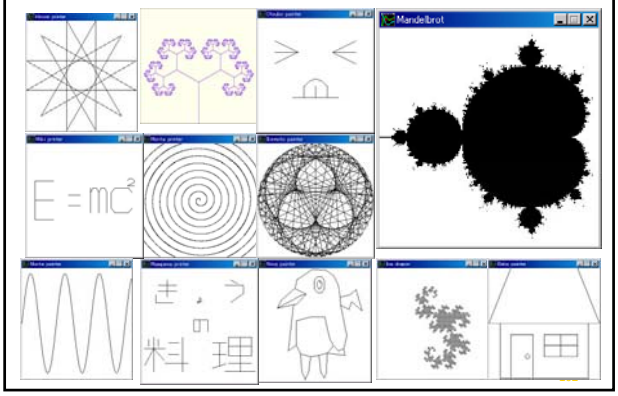

随意課題3: 3月15日午後5時締切

circle-limit を作成せよ。

プログラムはメイルで

okuno@i.kyoto-u.ac.jp



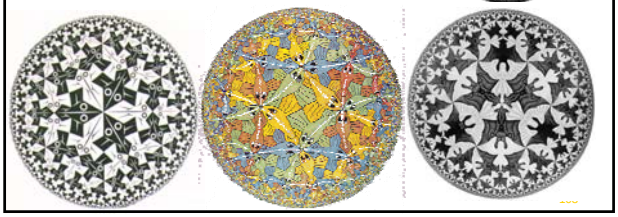

Escher's Square-Limit（1）

104

Escher's Square-Limit（2）

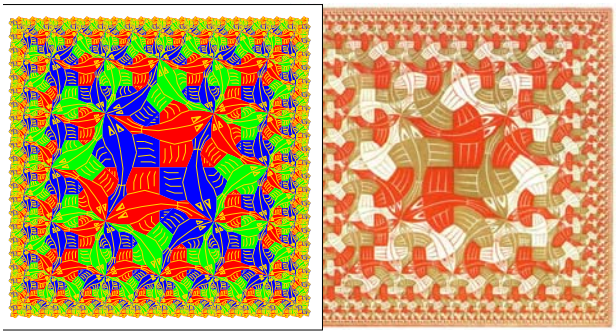

105

前田君のCircle-limit

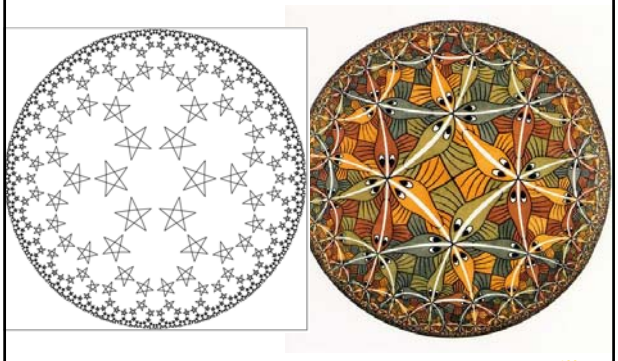

106

EscherのCircle-limit IV (1960)

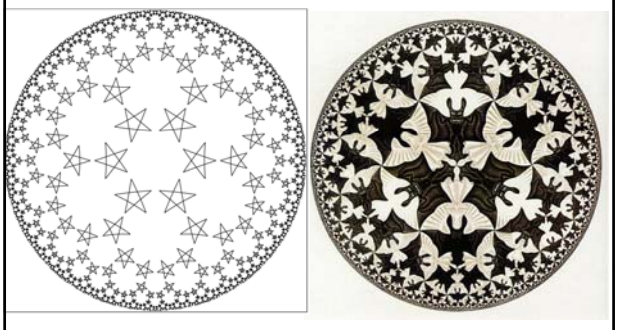

107

Huang君の作品（H20受講生）

108